




Your Best Source for Aluminum
Savings, Service and Selection

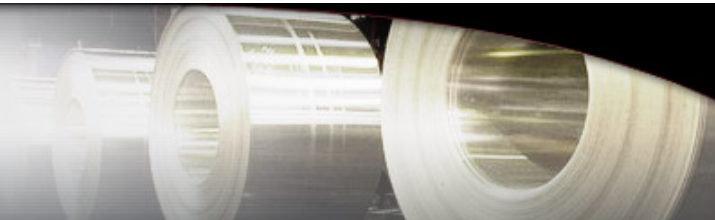

ALUMINUM ASSOCIATION STANDARD SHEET TOLERANCES

SPECIFIED WIDTHS:

WIDTH TOLERANCE: UP THRU 6" 6" THRU 24" 24" THRU 60" 60" THRU 96" OVER 96"

THICKNESS:

.006" THRU .124"	+/- .0625"	+/- .0938"	+/- .1250"	+/- .1250"	+/- .1563"
.125" THRU .249"	+/- .0938"	+/- .0938"	+/- .1250"	+/- .1563"	+/- .1875"

LENGTH TOLERANCE: UP THRU 30" OVER 30" THRU 60" 60" THRU 120" OVER 120" THRU 240" OVER 240" THRU 360"

THICKNESS:

.006" THRU .124"	+/- .0625"	+/- .0938"	+/- .1250"	+/- .1563"	+/- .1875"
.125" THRU .249"	+/- .0938"	+/- .0938"	+/- .1250"	+/- .1563"	+/- .2188"

SQUARENESS TOLERANCE FOR ALL THICKNESSES:

THROUGH 12 FT. LONG

<u>UP THRU 12" WIDE</u>	<u>OVER 12" THRU 24"</u>	<u>OVER 24" THRU 36"</u>	<u>OVER 36" THRU 48"</u>	<u>OVER 48" THRU 60"</u>	<u>OVER 60" THRU 72"</u>
+/- .094"	+/- .1875"	+/- .2810"	+/- .3125"	+/- .3900"	+/- .6540"

OVER 12 FT. LONG

+/- .1410"	+/- .2820"	+/- .4380"	+/- .4380"	+/- .5450"	+/- .6540"
------------	------------	------------	------------	------------	------------